

MMFCJS Compact Aluminium Series




Technical specification

Application:	Magnetic pressure filter
Port size:	G ½"
Flow rate:	max. 30 LPM
Working pressure:	max. 100 Bar
Element collapse pressure:	21 Bar
Clogging indicator setting	Δp 6 Bar
Seals:	Perbunan
Material:	Aluminium head and bowl
Compatibility	Suitable for mineral oils, lubrication oils, non-flam fluids, synthetic and rapidly biodegradable oils (for use with water, please contact our technical dept.)
Tested according to ISO standards:	ISO2941 Collapse/burst resistance ISO2942 Fabrication integrity ISO2943 Material compatibility integrity ISO3723 Method for end load test ISO3724 Flow fatigue characteristics ISO3968 Pressure drop vs. Flow ISO16889 Multi-pass (filtration performance)

Technical specification subject to change without prior notice. Other specification on request 013/07/23

FILTER SELECTOR

Select your filter requirements here.

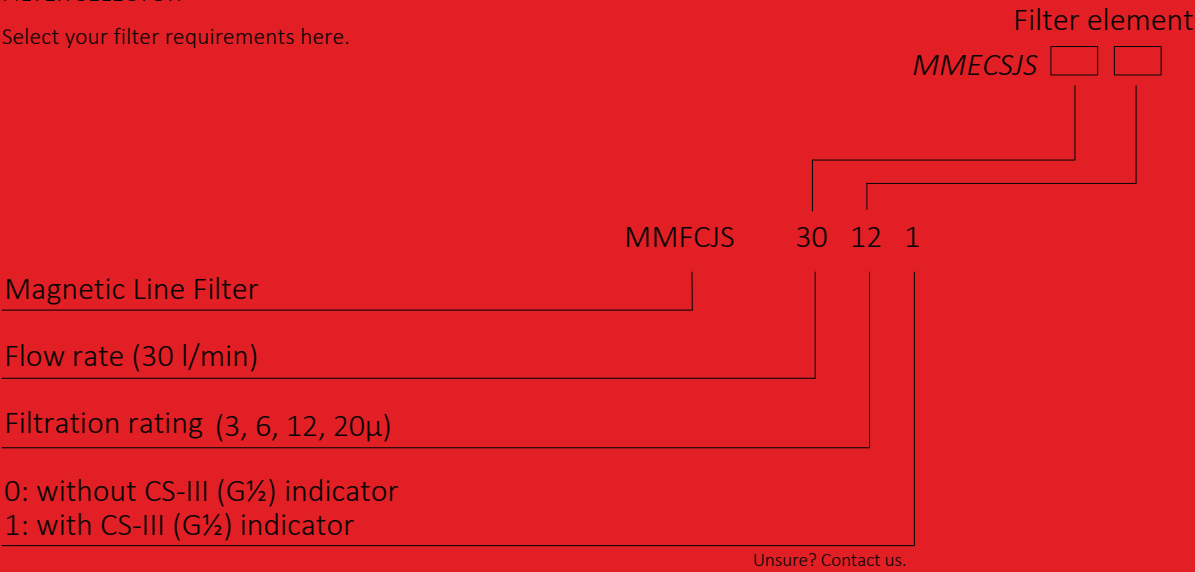


Technical data

Model	Flow rate (l/min)	Filtration rating (µ m)	Pressure options (Bar)	By-pass valve setting (Bar)	Element No.
MMFCJS-4	30	3 6 12 20	10 0	6	MMECSJS-4 + µ

Technical specification subject to change without prior notice. Other specification on request. 2013/07/23

Mounting size

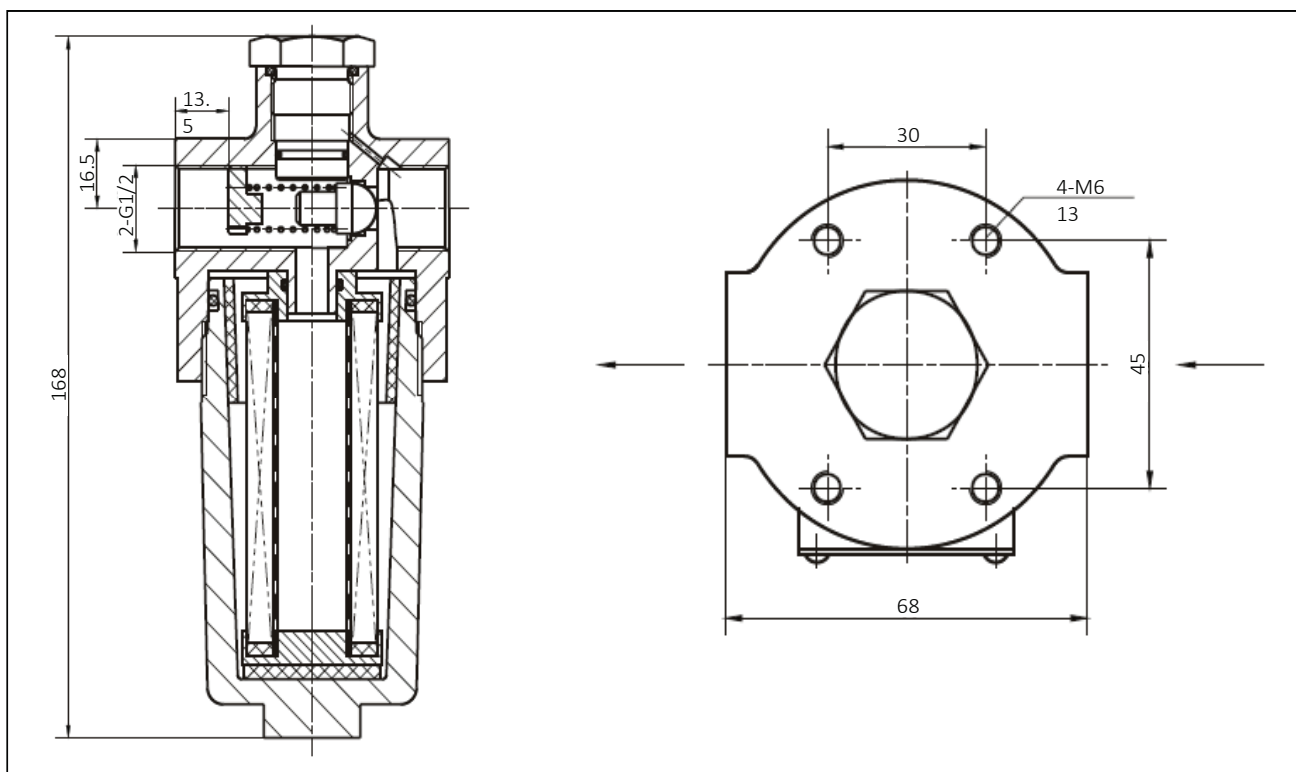

Technical specification subject to change without prior notice. Other specification on request. 2013/07/23

[illegible]